




## ferro hinged door storage datasheet

### Extent of Range

Ferro Hinged Door storage is available in 800mm and 1000mm wide. Heights from 720mm to 2007mm to compliment the Ferro range.

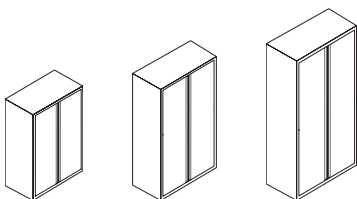

### Delivery

This range is delivered pre-assembled by the Flexiform installation team, wrapped for protection.

### Product Warranty

15 years subject to our standard T&C's. See the Flexiform Standard Warranty document for more information.

### Features

**Carcass:** 4 stage treatment process steel. Fully welded for exceptional rigidity and stiffness. Side panels are non load bearing and are fixed to top, back and base. No joins in the carcass to front or side elevations.

**Doors:** Fully welded 18 gauge steel with stiffening rails.

**Hinges:** 3 hinges per side, designed for 120 degree opening ensuring clear access space for users.

**Levelling:** Floor levelling feet supplied.

**Handles:** Full height recessed handle for easy opening and closing for all users with 2 point locking system.

**Components:** 20swg inner panels incorporate 12.7mm slot centres to enable full range of internal components to be fitted.

### Components

Pigeon holes, plain shelves, slotted shelves, lateral plain shelf with fixed suspension rail, lateral suspended filing rail, coat shelf with coat rail.

### Dimensions

**Heights:** 1017mm, 1322mm, 1677mm, 2007mm.

**Heights (with MFC top):** 720mm, 740mm, 1090mm, 1110mm.

**Widths:** 800mm, \*825mm and 1000mm.

**Depth:** 475mm.

flexiform

---

## Materials

**MFC Top Panels:** 25mm melamine faced chipboard (M.F.C) with 2mm ABS matching edging or contrasting edging. British standard 476 class 1 surface spread of flame. Meets E1 European standards on Formaldehyde emissions.


**Steel:** Powder coated steel with minimum paint coverage thickness of 35 Microns. Indentation, cross cut+adhesion and bend tested.

**High Pressure Laminate:** 25mm high pressure laminate with 2mm ABS matching edging. British standard 476 class 1 surface spread of flame. Meets E1 European standards on Formaldehyde emissions.


---

## MFC Finishes

Standard Flexiform finishes. Additional colour options available (may incur an upcharge).



White 25mm MFC with matching edge. Code: WHM



Grey 25mm MFC with matching edge. Code: MOG



Oak 25mm MFC with matching edge. Code: MOK



Beech 25mm MFC with matching edge. Code: MOB



Romano Cherry 25mm MFC with matching edge. Code: RCM



Maple 25mm MFC with matching edge. Code: MOM



Walnut 25mm MFC with matching edge. Code: MOW



White 25mm MFC with contrasting oak edge. Code: WHO



White 25mm MFC with contrasting multiplex edge. Code: WHX




White 25mm MFC with contrasting black edge. Code: WHB

---

## High Pressure Laminate Finishes


Standard Flexiform finishes. Additional colour options available (may incur an upcharge).



Nebraska Oak  
Code: NEB



Jackson Pine  
Code: JAC




Concrete Light  
Code: Bepsoko

---

## Steel Finishes

Standard Flexiform Ferro clear coat laquer.



Clear coat lacquer  
Code: CCG

---

## Product Environmental Certification



---

## Product Recyclable Content

Approximately 98% recyclable.

---

## Product Certificate

BS EN 14073-2:2004, BS EN 14073-3:2004,  
BS EN 14074:2004.

flexiform