


additions 2 tables datasheet & environmental report

Extent of Range

Additions 2 tables are specified in separate parts to give a larger variety of combinations; the frame, a choice of 2 legs and the work top.

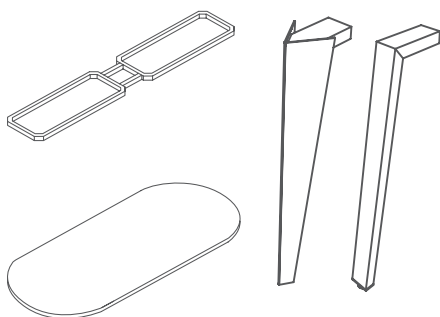

Delivery

This range is assembled on site by Flexiform installation team, wrapped for protection.

Product Warranty

15 years subject to our standard T&C's. See the Flexiform Standard Warranty document for more information.

Features

Type: Multi-use tables.

Metal Legs: A2 Spider or A3 Torch legs. Available in epoxy powder coated paint or polished chrome.

Wooden Legs: A4 Wilson solid oak hand turned leg with foot leveller.

Frame: Welded frame manufactured from 50mm x 25mm rectangle section tube with concealed fixings. Available as a 1 piece frame and 4 legs or 2 piece frame and 6 legs.

Tops: 25mm MFC as standard. Available in square, rectangular, circular, barrel, D ended and elliptical shapes.

Power and Data: Additions 2 Tables can be specified with cut out for power and data. Power and data modules not included.

Optional Cable Management: Available with or without cable trays and a central cable tower. Cable trays are placed in the centre of the table 400mm away from the edge at a minimum.

Coffee Table Dimensions

Shapes: Circular and rectangular

Height: 450mm

Widths: 800mm, 1000mm

Depths: 600mm, 800mm or 1000mm

Dining Height Table Dimensions

Shapes: Square, rectangular, circular, barrel, D ended and elliptical shapes.

Height: 740mm

Widths: 800mm, 1000mm, 1200mm, 1400mm, 1600mm, 1800mm, 2000mm, 2200mm, 2400mm, 2800mm, 3200mm, 3600mm or 4000mm.

Depths: 800mm, 1000mm, 1200mm, 1600mm.

Bar Height Table Dimensions

Bespoke poseur height tables available.

Please contact Flexiform for details.

flexiform

Materials

MFC Top Panels: 25mm melamine faced chipboard (M.F.C) with 2mm ABS matching edging or contrasting edging. British standard 476 class 1 surface spread of flame. Meets E1 European standards on Formaldehyde emissions.

Steel: Powder coated steel with minimum paint coverage thickness of 35 Microns. Indentation, cross cut+adhesion and bend tested.



















MFC Finishes

Standard Flexiform finishes. Additional colour options available (may incur an upcharge).

	White 25mm MFC with matching edge. Code: WHM
	Grey 25mm MFC with matching edge. Code: MOG
	Oak 25mm MFC with matching edge. Code: MOK
	Beech 25mm MFC with matching edge. Code: MOB
	Romano Cherry 25mm MFC with matching edge. Code: RCM
	Maple 25mm MFC with matching edge. Code: MOM
	Walnut 25mm MFC with matching edge. Code: MOW
	White 25mm MFC with contrasting oak edge. Code: WHO
	White 25mm MFC with contrasting multiplex edge. Code: WHX
	White 25mm MFC with contrasting black edge. Code: WHB

Steel Finishes


Standard Flexiform finishes. Additional colour options available (may incur an upcharge).

	Black. RAL9011 Code: BLS
	Silver. RAL9006 Code: JOS
	Graphite Grey. RAL7024 Code: GGS
	Pale Grey. RAL7035 Code: PGS
	White. RAL9016 Code: JWS
	Arrow Red. RAL3001 Code: ARG
	Carmine Red. RAL3002 Code: CRS
	Deep Orange. RAL2011 Code: ORS
	Zinc Yellow. RAL1018 Code: ZYS
	Fern Green. RAL6018 Code: FGB
	Water Blue. RAL5021 Code: WBS
	Sky Blue. RAL5015 Code: SBB
	Ultramarine Blue. RAL5002 Code: UBS
	Signal Blue. RAL5005 Code: SBS
	Regal Blue. RAL5012. Code: RBS
	Pastel Mauve. RAL4009. Code: PMS
	Pastel Turquoise. RAL6034. Code: PTS
	Tauben Blue. RAL5014. Code: TGS
	Khaki Green. RAL6013. Code: KGS

Product Carbon Footprint

Our carbon footprint data is based on a life cycle assessment on a 1400mm x 800mm Additions 2 Table. Product weight: 37.1kg. Information extracted from report 'Product Carbon Footprint and Environmental Impact Assessments' prepared by Eco3, 2017.

Carbon Footprint: 135Kg CO₂e.

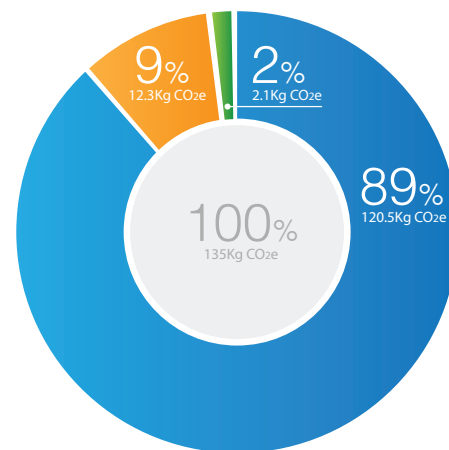

	Supply Chain Transport
	Materials & Sub Assemblies
	In-House Processing

Product Environmental Certification



Product Certification

Tested to BS EN 15372:2008 Test Level 3 (severe contract use)

flexiform