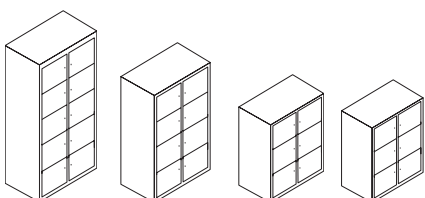# freestor accent lockers
datasheet & environmental report

Extent of Range
Freestor Accent Lockers are available in 800mm, 825mm* and 1000mm wide. 6, 8 or 10 locker compartment configurations.

Delivery
This range is delivered pre-assembled by the Flexiform installation team, wrapped for protection.

Product Warranty
15 years subject to our standard T&C's. See the Flexiform Standard Warranty document for more information

Product Certification
BS EN 14073- 2&3: 2004 and BS EN 14074:2004

Features
Type: Multi-tiered lockers.
Carcass: Welded carcase with riveted back. Side panels have ladder track stiffeners for strength and allows additional accessories to be fitted.
Doors: 20SWG Folded assembly with integral stiffener.
Hinges: Supplied as standard with concealed hinges 100° opening. Optional extras are concealed Soft Close Hinges.
Locks: 8 lock options: cam lock, cam lock and name plate, C4 combination locks (black or white housing), coin-op return, coin op - return and deposit lock, Ronis Tronic Evolution, Ronis RFID Mifare.
Compartment Numbering: 3 digit or 4 digit number plaques on 30mm hole centre punching. Numbers are engraved in black text on white foreground. Please order number plaques as an SPB as separate line on the sales order.
Key Locking Bottom Drawer: 288mm (h) x 400mm (d) x various widths. Replaces bottom lockers.

Features Continued...
Labels: Small 29mm x 50mm label or large 55mm x 90mm self adhesive label.
Post Slots: 25mm high slot. 245mm or 305mm wide depending upon unit.
Levelling: Floor levelling feet supplied.
Components: 20swg inner panels incorporate 12.7mm slot centres for shelves or trays.

Components
Adjustable shelf and tray. Hotboxes available.

Dimensions
Heights: 1322mm (6 door locker), 1742mm (8 door locker), 2150mm (10 door locker).
Heights (with MFC top): 1110mm (6 door locker).
Widths: 800mm, *825mm and 1000mm.
Depth: 475mm.

*825mm unit only available on 1110mm high unit as standard.

flexiform

Materials

MFC Top Panels: 25mm melamine faced chipboard (M.F.C) with 2mm ABS matching edging or contrasting edging. British standard 476 class 1 surface spread of flame. Meets E1 European standards on Formladehyde emissions.

Steel: Powder coated steel with minimum paint coverage thickness of 35 Microns. Indentation, cross cut+adhesion and bend tested.

MFC Finishes

Standard Flexiform finishes. Additional colour options available (may incur an upcharge).

White 25mm MFC with matching edge. Code: WHM

Grey 25mm MFC with matching edge. Code: MOG

Oak 25mm MFC with matching edge. Code: MOK

Beech 25mm MFC with matching edge. Code: MOB

Romano Cherry 25mm MFC with matching edge. Code: RCM

Maple 25mm MFC with matching edge. Code: MOM

Walnut 25mm MFC with matching edge. Code: MOW

White 25mm MFC with contrasting oak edge. Code: WHO

White 25mm MFC with contrasting multiplex edge. Code: WHX

White 25mm MFC with contrasting black edge. Code: WHB

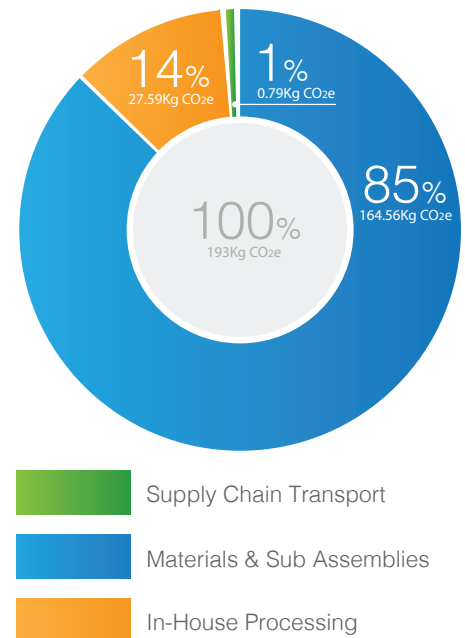## Steel Finishes

Standard Flexiform finishes. Additional colour options available (may incur an upcharge).

Black. RAL9011
Code: BLS

Silver. RAL9006
Code: JOS

Graphite Grey. RAL7024
Code: GGS

Pale Grey. RAL7035
Code: PGS

White. RAL9016
Code: JWS

Arrow Red. RAL3001
Code: ARG

Carmine Red. RAL3002
Code: CRS

Deep Orange. RAL2011
Code: ORS

Zinc Yellow. RAL1018
Code: ZYS

Fern Green. RAL6018
Code: FGB

Water Blue. RAL5021
Code: WBS

Sky Blue. RAL5015
Code: SBB

Ultramarine Blue. RAL5002
Code: UBS

Signal Blue. RAL5005
Code: SBS

Regal Blue. RAL5012.
Code: RBS

Pastel Mauve. RAL4009.
Code: PMS

Pastel Turquoise. RAL6034.
Code: PTS

Tauben Blue. RAL5014.
Code: TGS

Khaki Green. RAL6013.
Code: KGS

Product Carbon Footprint

Our carbon footprint data is based on a life cycle assessment on a 8 door Accent Locker Unit. Product weight: 64.9kg. Information extracted from report 'Product Carbon Footprint and Environmental Impact Assessments' prepared by Eco3, 2017. Carbon Footprint: 193Kg CO_2e.

- 14% 27.59Kg CO_2e
- 1% 0.79Kg CO_2e
- 85% 164.56Kg CO_2e
- 100% 193Kg CO_2e

- Supply Chain Transport
- Materials & Sub Assemblies
- In-House Processing

Product Recyclable Content

Approximately 98% recyclable.

Product Environmental Certification

flexiform