




## freestor tambour storage datasheet

### Extent of Range

Freestor Tambour Storage is available in 800mm and 1000mm wide.

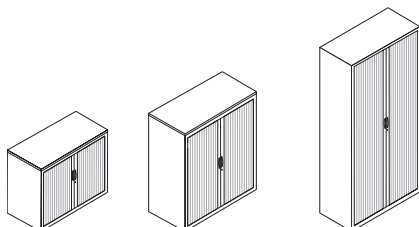

### Delivery

This range is delivered pre-assembled by the Flexiform installation team, wrapped for protection.

### Product Warranty

15 years subject to our standard T&C's. See the Flexiform Standard Warranty document for more information

### Features

**Type:** Retracting door storage.

**Carcass:** 4 stage treatment process steel. Fully welded for exceptional rigidity and stiffness. Side panels are non load bearing and are fixed to top, back and base. No joins in the carcass to front or side elevations.

**Tambour Shutter:** Co-extruded plastic slats with a smooth exterior surface. Run smoothly in an inset one piece injection moulded track fitted at the base and top of the cabinet.

**Lock:** Two point locking Lowe and Fletcher lock type 5689-2.

**Levelling:** Floor levelling feet supplied.

**Handles:** Insert handle with magnetic closure.

**Components:** 20swg inner panels incorporate 12.7mm slot centres to enable full range of internal components to be fitted.

### Components

Pull out shelf, pull out filing frame with 2x AR rails, pigeon holes, plain shelf, slotted shelf, lateral plain shelf with fixed suspension rail, lateral suspended filing rail, long rail with A4 suspended, single drawer, 8" centre drawer, 11" centre drawer.

### Dimensions

Heights: 695mm, 715mm, 1017mm, 1200mm 1322mm, 1490mm, 1677mm, 1720mm, 2007mm

Heights (with MFC top): 720mm, 740mm, 1090mm, 1110mm.

Widths: 800mm, 825mm\* 1000mm.

Depth: 475mm.





## Materials

**MFC Top Panels:** 25mm melamine faced chipboard (M.F.C) with 2mm ABS matching edging or contrasting edging. British standard 476 class 1 surface spread of flame. Meets E1 European standards on Formaldehyde emissions.

**Steel:** Powder coated steel with minimum paint coverage thickness of 35 Microns. Indentation, cross cut+adhesion and bend tested.




















## MFC Finishes

Standard Flexiform finishes. Additional colour options available (may incur an upcharge).






	White 25mm MFC with matching edge. Code: WHM
	Grey 25mm MFC with matching edge. Code: MOG
	Oak 25mm MFC with matching edge. Code: MOK
	Beech 25mm MFC with matching edge. Code: MOB
	Romano Cherry 25mm MFC with matching edge. Code: RCM
	Maple 25mm MFC with matching edge. Code: MOM
	Walnut 25mm MFC with matching edge. Code: MOW
	White 25mm MFC with contrasting oak edge. Code: WHO
	White 25mm MFC with contrasting multiplex edge. Code: WHX
	White 25mm MFC with contrasting black edge. Code: WHB

## Steel Finishes

Standard Flexiform finishes. Additional colour options available (may incur an upcharge).

	Black. RAL9011 Code: BLS
	Silver. RAL9006 Code: JOS
	Graphite Grey. RAL7024 Code: GGS
	Pale Grey. RAL7035 Code: PGS
	White. RAL9016 Code: JWS
	Arrow Red. RAL3001 Code: ARG
	Carmine Red. RAL3002 Code: CRS
	Deep Orange. RAL2011 Code: ORS
	Zinc Yellow. RAL1018 Code: ZYS
	Fern Green. RAL6018 Code: FGB
	Water Blue. RAL5021 Code: WBS
	Sky Blue. RAL5015 Code: SBB
	Ultramarine Blue. RAL5002 Code: UBS
	Signal Blue. RAL5005 Code: SBS
	Regal Blue. RAL5012. Code: RBS
	Pastel Mauve. RAL4009. Code: PMS
	Pastel Turquoise. RAL6034. Code: PTS
	Tauben Blue. RAL5014. Code: TGS
	Khaki Green. RAL6013. Code: KGS

## Shutter Colours

	White Code: WH
	Silver Code: SL
	Light Grey Code: LG
	Dark Grey Code: DG
	Black Code: BK

## Product Environmental Certification



**Product Recyclable Content**  
Approximately 94% recyclable.

## Product Certification

BS EN 14073-2:2004, BS EN 14073-3:2004,  
BS EN 14074:2004.

flexiform