




metro storage datasheet

Extent of Range

Standalone storage cabinets with shelving.

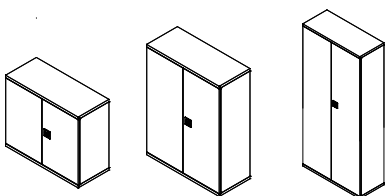

Delivery

This range is delivered to site by the Flexiform installation team, wrapped for protection.

Product Warranty

15 years subject to our standard T&C's. See the Flexiform Standard Warranty document for more information.

Features

Type: Standalone storage unit.

Construction: Metal storage unit manufactured from 20swg mild steel. Factory assembled.

Lock: Locking double doors with 2 bar vertical locking bar system, locking to the top and bottom of the door into the carcass. Supplied with 2 keys (1 is folding). Black outer / Silver handle. Mastered to PCC02.

Top: 25mm MFC top with 2mm ABS edging included with 720mm and 740mm units. Optional additional top available for large units.

Accessories: 50mm pitch ladder track for adjustable shelves. Optional steel shelf and magnetic dividers available.

Feet: Height adjustable feet included on 720mm and 740mm cabinets, designed to adjust to desk height.

Magnetic Dividers: Magnetic L Shape dividers manufactured in 18swg.

Shelves: Plain shelves 20SWG (will suspend hanging files underneath at 330ctr pitch)

Feet Levelling: Desk high units (720/740mm) feature levelling feet.

Dimensions

Height: 720mm, 740mm, 1315mm, 1915mm.

Widths: 800mm, 825mm, 1000mm..

Depth: 430mm.

Space Planning with Metro

Hinge Mechanism

Due to the nature of the hinge mechanism, it is necessary to leave a 4mm gap in between units to enable the doors to open fully without rubbing on the adjoining units.

Feet Levelling

We advise undertaking an accurate site survey to determine the suitability of Metro 1315mm and 1915mm high units. Minimum levelling is only possible using shims or wedges (packs available).

flexiform


Materials

MFC Top Panels: 25mm melamine faced chipboard (M.F.C) with 2mm ABS matching edging or contrasting edging. British standard 476 class 1 surface spread of flame. Meets E1 European standards on Formaldehyde emissions.


Steel: Powder coated steel with minimum paint coverage thickness of 35 Microns. Indentation, cross cut+adhesion and bend tested.

MFC Finishes

Standard Flexiform finishes. Additional colour options available (may incur an upcharge).



White 25mm MFC with matching edge. Code: WHM



Grey 25mm MFC with matching edge. Code: MOG



Oak 25mm MFC with matching edge. Code: MOK



Beech 25mm MFC with matching edge. Code: MOB



Romano Cherry 25mm MFC with matching edge. Code: RCM



Maple 25mm MFC with matching edge. Code: MOM



Walnut 25mm MFC with matching edge. Code: MOW



White 25mm MFC with contrasting oak edge. Code: WHO



White 25mm MFC with contrasting multiplex edge. Code: WHX




White 25mm MFC with contrasting black edge. Code: WHB

Steel Finishes

Standard Flexiform finishes. Additional colour options available (may incur an upcharge).



Black. RAL9011
Code: BLS



Silver. RAL9006
Code: JOS



Graphite Grey. RAL7024
Code: GGS



Pale Grey. RAL7035
Code: PGS



White. RAL9016
Code: JWS



Arrow Red. RAL3001
Code: ARG



Carmine Red. RAL3002
Code: CRS



Deep Orange. RAL2011
Code: ORS



Zinc Yellow. RAL1018
Code: ZYS



Fern Green. RAL6018
Code: FGB



Water Blue. RAL5021
Code: WBS



Sky Blue. RAL5015
Code: SBB



Ultramarine Blue. RAL5002
Code: UBS



Signal Blue. RAL5005
Code: SBS



Regal Blue. RAL5012.
Code: RBS



Pastel Mauve. RAL4009.
Code: PMS



Pastel Turquoise. RAL6034.
Code: PTS



Tauben Blue. RAL5014.
Code: TGS



Khaki Green. RAL6013.
Code: KGS

Product Environmental Certification



Environmental Data

Recycled content: 29.87%

Recyclable content: 99.78%

Product Certification

Tested to BS EN 14073-2:2004, BS EN 14073-3:2004 and BS EN 14074:2004.

flexiform