




flexiform 55 shelving datasheet

Extent of Range

The Flexilink 55 Shelving range comes in plain or ventilated panels. For a complete unit the product is specified in parts including back panel, mid panels, end panels and shelves.

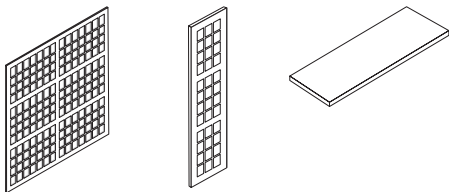

Features

Type: Bay Shelving. Minimum of 2 bays required for rigidity.

Panels: Ventilated or plain panels. Made up of back panels, end panels, mid panels and shelves. 20 gauge steel.

Bespoke Cladding: Bespoke tops or cladding available. 25mm MFC or 50mm high pressure laminate. Please contact a Flexiform representative for details.

Components: 20swg inner panels incorporate 12.7mm slot centres to enable full shelves to be fitted.

Components

Dividers, plain shelves, slotted shelves and plain shelf with fixed suspension rails.

Dimensions

Heights: 975mm, 1275mm, 1575mm, 1875mm or 2175mm.

Bay Widths: 600mm, 800mm, 900mm, 1000mm, 1200mm.

Depth: 250mm, 200mm, 250mm, 400mm, 500mm or 600mm.


Delivery

This range is assembled on site by the Flexiform installation team, wrapped for protection.

Product Warranty

10 years from installation.

flexiform

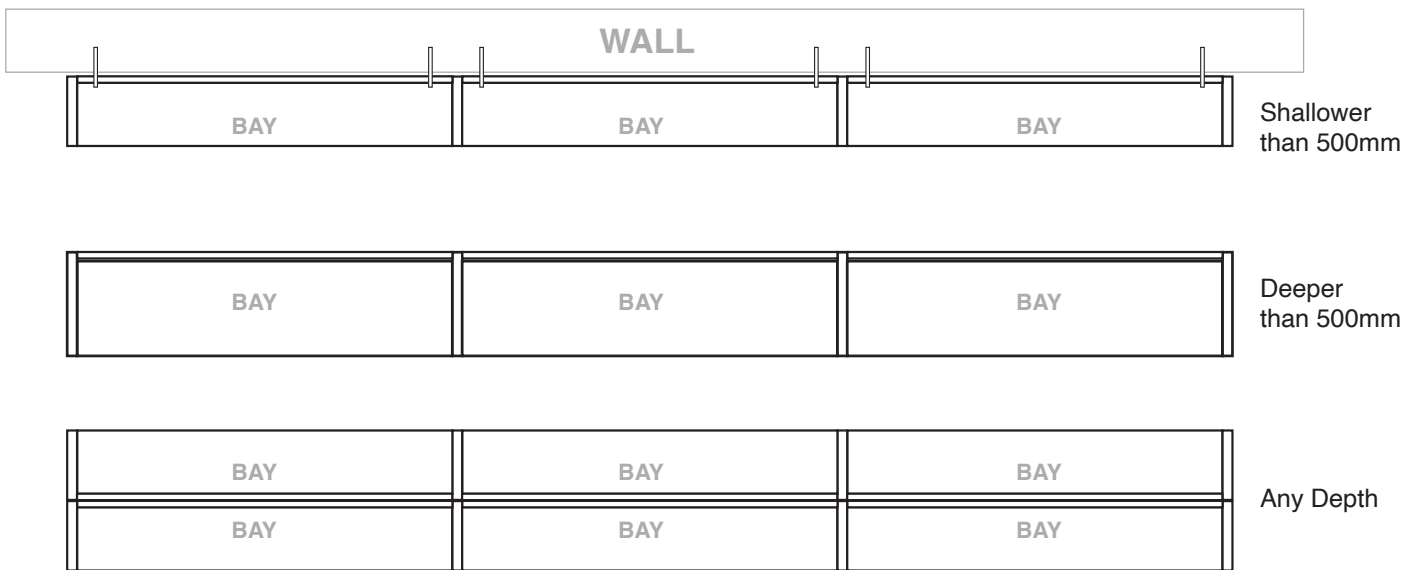

- ✓ Single sided shelving configurations under 500mm deep must be secured to wall
- ✓ Single shelving with a depth over 500mm can be freestanding
- ✓ Back-to-back shelving of any depth can be freestanding
- ✓ Must be a minimum of 2 bays side-by-side
- ✓ Floor must be level








Materials

MFC Top Panels: 25mm melamine faced chipboard (M.F.C) with 2mm ABS matching edging or contrasting edging. British standard 476 class 1 surface spread of flame. Meets E1 European standards on Formaldehyde emissions.

Steel: Powder coated steel with minimum paint coverage thickness of 35 Microns. Indentation, cross cut+adhesion and bend tested.



MFC Finishes

Standard Flexiform finishes. Additional colour options available (may incur an upcharge).

	White 25mm MFC with matching edge. Code: WHM
	Grey 25mm MFC with matching edge. Code: MOG
	Oak 25mm MFC with matching edge. Code: MOK
	Beech 25mm MFC with matching edge. Code: MOB
	Romano Cherry 25mm MFC with matching edge. Code: RCM
	Maple 25mm MFC with matching edge. Code: MOM
	Walnut 25mm MFC with matching edge. Code: MOW
	White 25mm MFC with contrasting oak edge. Code: WHO
	White 25mm MFC with contrasting multiplex edge. Code: WHX

Steel Finishes

Standard Flexiform finishes. Additional colour options available (may incur an upcharge).

	Black. RAL9011 Code: BLS
	Silver. RAL9006 Code: JOS
	Graphite Grey. RAL7024 Code: GGS
	Pale Grey. RAL7035 Code: PGS
	White. RAL9016 Code: JWS
	Arrow Red. RAL3001 Code: ARG
	Carmine Red. RAL3002 Code: CRS
	Deep Orange. RAL2011 Code: ORS
	Zinc Yellow. RAL1018 Code: ZYS
	Fern Green. RAL6018 Code: FGB
	Water Blue. RAL5021 Code: WBS
	Sky Blue. RAL5015 Code: SBB
	Ultramarine Blue. RAL5002 Code: UBS
	Signal Blue. RAL5005 Code: SBS
	Regal Blue. RAL5012. Code: RBS
	Pastel Mauve. RAL4009. Code: PMS
	Pastel Turquoise. RAL6034. Code: PTS
	Tauben Blue. RAL5014. Code: TGS
	Khaki Green. RAL6013. Code: KGS

Product Environmental Certification



Product Recyclable Content

Approximately 98% recyclable.

Product Certificate

BS EN 14073-2:2004, BS EN 14073-3:2004 and BS EN 14074:2004

flexiform